

SEASONED SHADE BLEND



*Autumn shades meet radiant elegance,
where every hue tells a timeless story*

TAASA[®]
uPVC Profile



WOODEN TEXTURE



TL-801



TL-802



TL-803

SUSTAINABLE

Elegance




Timeless design rooted in nature,
where sustainability meets
effortless, everyday elegance.



WOODEN TEXTURE



TL-804

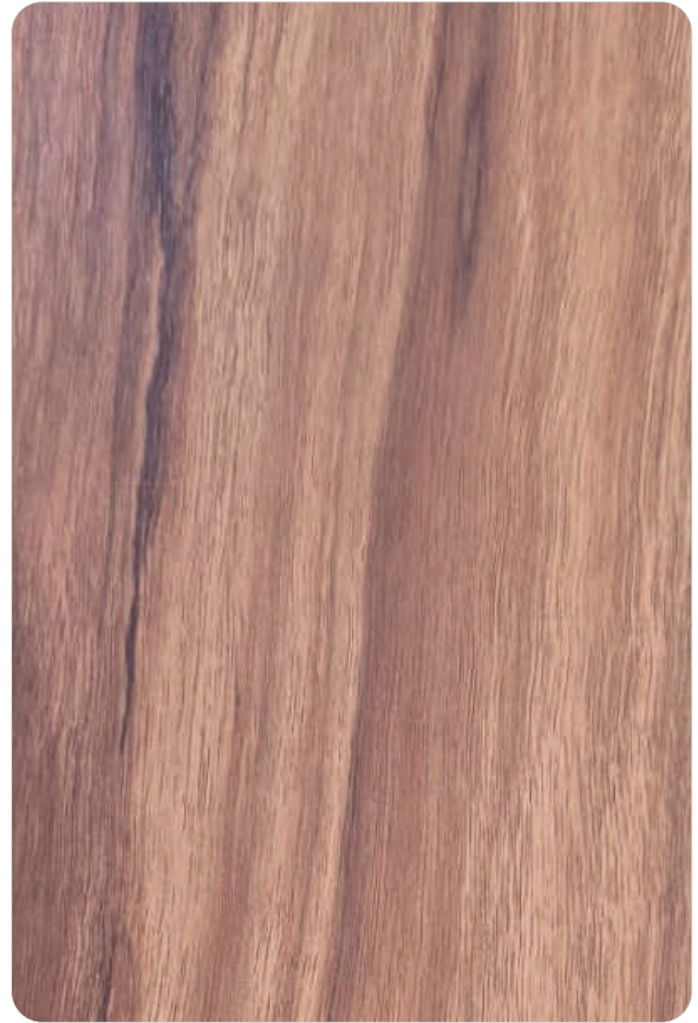


TL-805






FLUTE


TAASA[®]
uPVC Profile

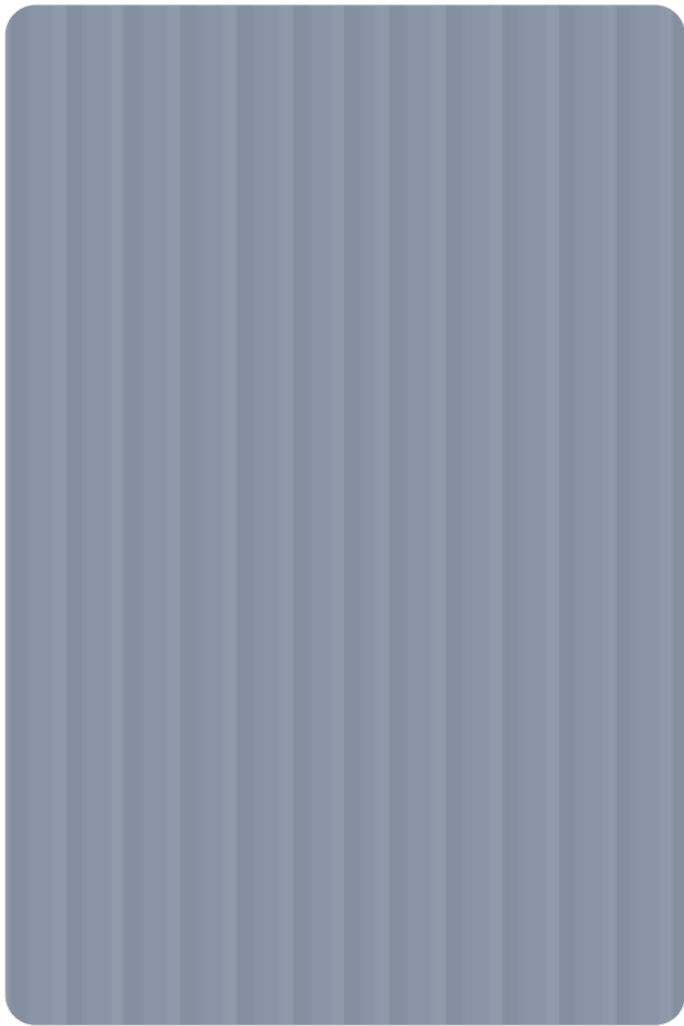


TLF-901

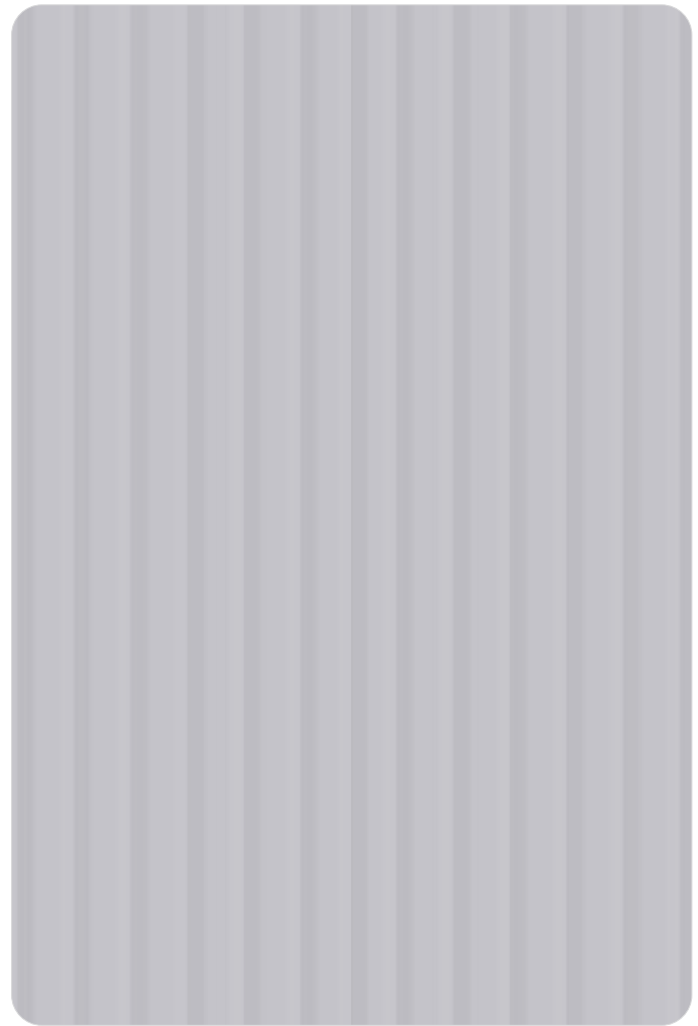

TLF-902

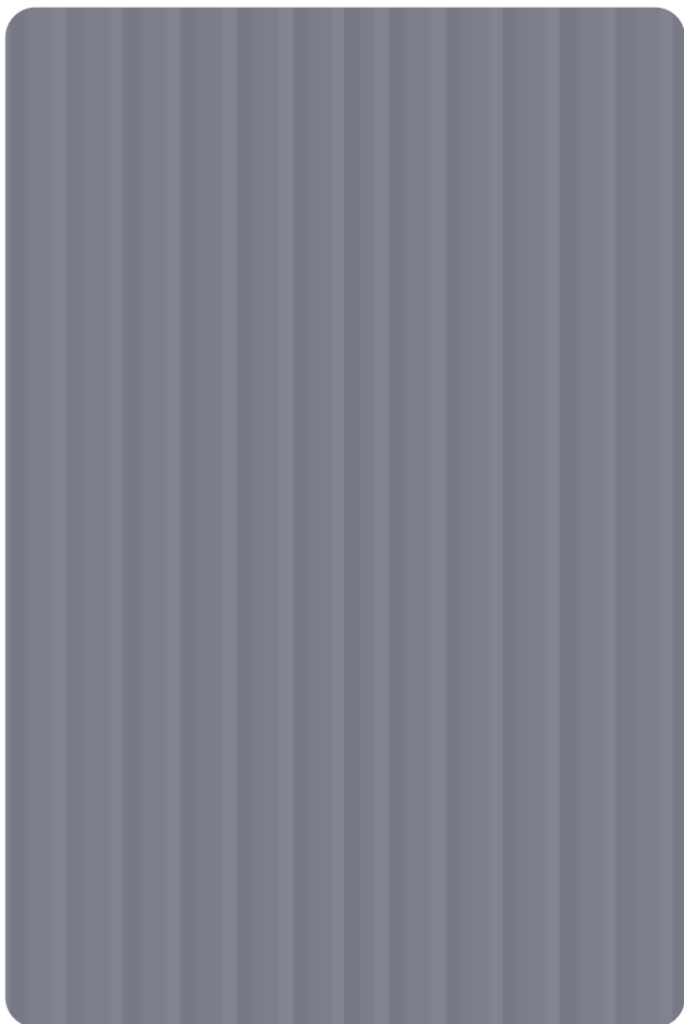

TLF-903

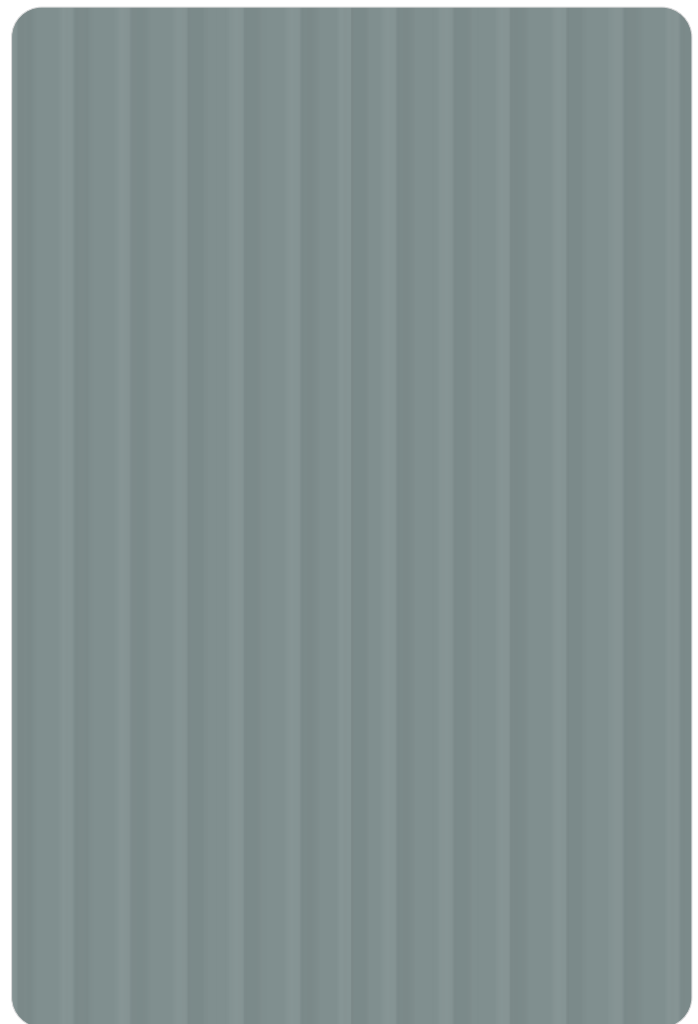


TLF-904



FLUTE


TAASA[®]
uPVC Profile

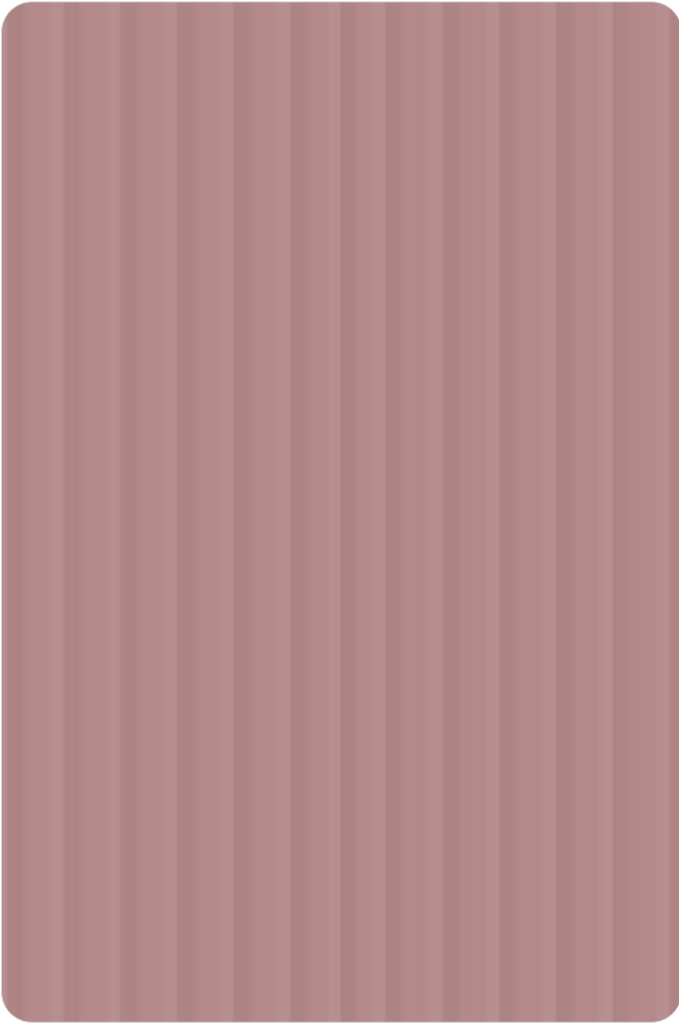

SUSTAINABLE

Elegance

Timeless design rooted in nature,
where sustainability meets
effortless, everyday elegance

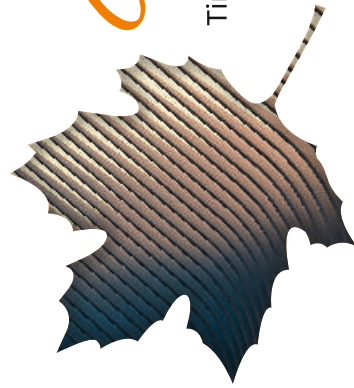


TLF-905




TLF-904




PLAIN TEXTURE

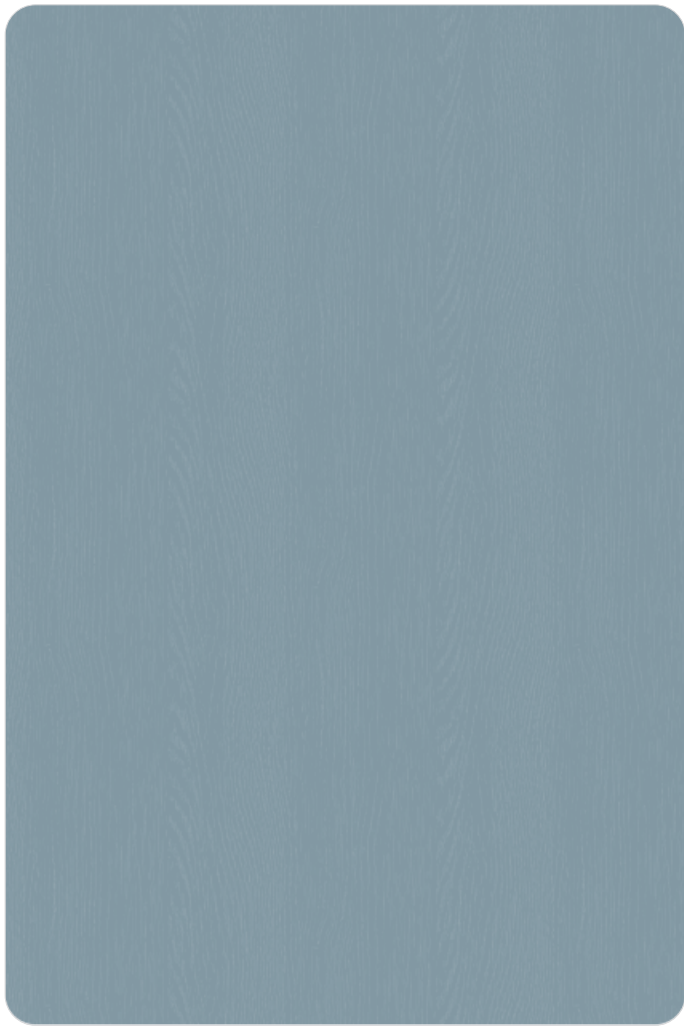


TL-701



TL-702

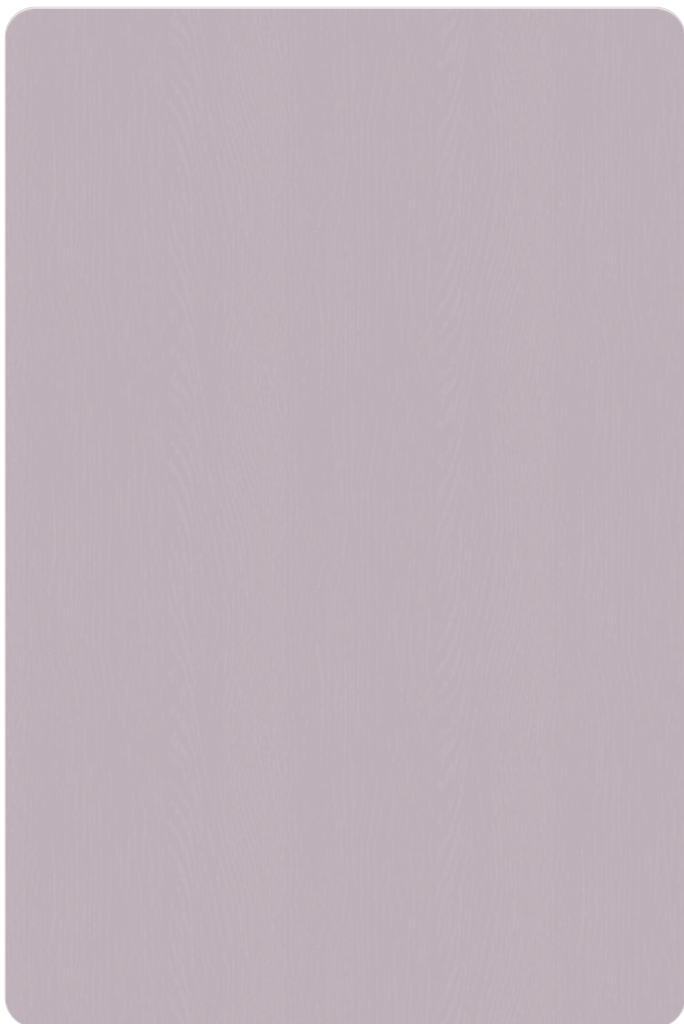

TL-703

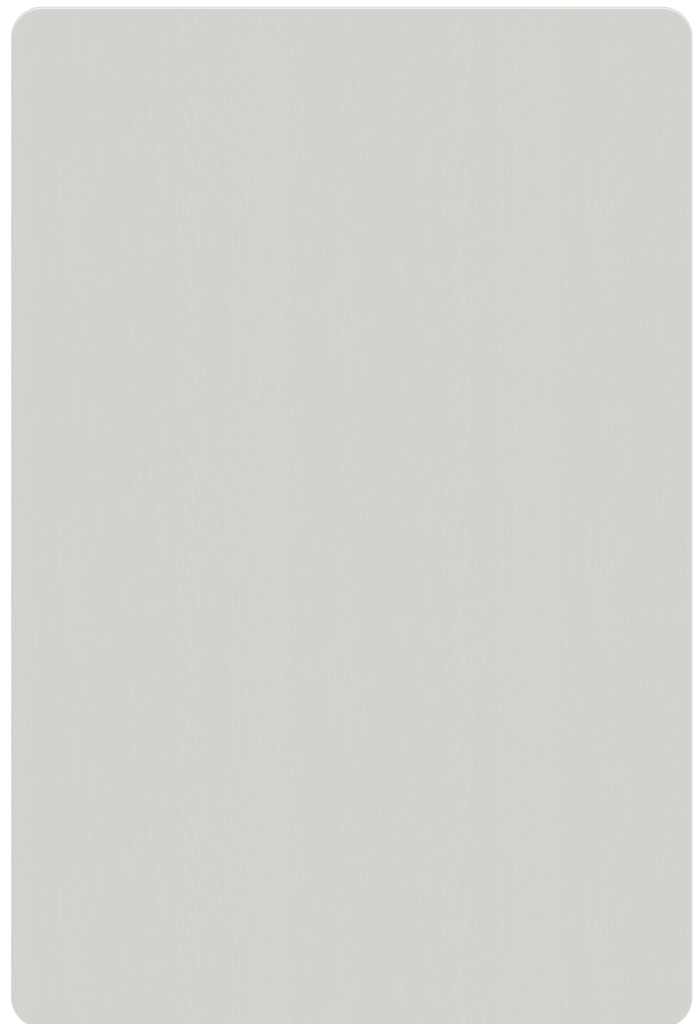

TL-704



PLAIN TEXTURE



TL-705

SUSTAINABLE
Elegance

Timeless design rooted in nature,
where sustainability meets
effortless, everyday elegance



- **Laminate Thickness :** 1.2 mm(±10%)
- **Liner Thickness :** 0.7mm(±10%) on Order Available in 0.7mm to 3mm Thickness
- **Standard Sheet Size :** 8x4 Feet (2400mm x 1200mm)
- **Wide Range :**
Our laminates come in wide range of colors, designs, textures and materials

■ **Adhesives to be used :**

For Superior results We recommend Fevicol Pro-Bond Special Adhesive for PVC and Acrylic laminates. These laminates are easy to apply with all normally used with plastic laminates such as water based and solvent based adhesive. We do not recommend use heat activated adhesive

■ **Cutting and Machining :**

Taasa Laminates can be cut, routed and drilled, with most standard. wood working tools or equipments, all blades must be sharp, to remove any burs that may occur in the cutting process, we recommend the use of a smooth, file to feather all corner Edges.

■ **Lamination :**

Proper substrates must be used and careful bonding procedures must be observed Substrates should be of good quality plywood, high density particle board or high quality fibre board. The face of the substrate must be smooth and free of grease, wax, dust, chips and other foreign matter.

■ **Bending and forming:**

Taasa Laminates can be bent and all radius bending should be handled in the same manner as all grades of non post forming decorative Laminates.

■ **Uses:**

When used on other type of horizontal surfaces they should be protected with glass or any other equivalent material. They can be used for kitchens, cabinetry, columns, ceilings, furniture, doors and also for commercial use wherever a modern contemporary look is desired.

■ **Care and Maintenance:**

Micro fiber clothes can be used for cleaning the surface after pre soaking. Surface should not be cleaned using a dry cloth. No scouring or abrasive cleaning material must be used since these will damage the brilliance of the surface gloss. Window cleaners, thinners, acetone, ammonia or other aggressive chemicals should not be used for cleaning.

KINDLY REMOVE THE PROTECTIVE FILM AFTER 7 DAYS OF INSTALLATION OF LAMINATES.

■ **Note**

Taasa warrants that all its products are free from manufacturing defects and perfectly fit for use in normal conditions. In case of any claim, the liability the company's is however limited to the cost of the product only. These may be batch to batch colour variation. The sample swatches only represent the designs, colours and finish. They do not represent the actual thickness.

CUSTOMIZED SIZES AND SHADES CAN BE DEVELOPED ON REQUEST.



Extra care required in vertical pasting of laminate sheets as there is possibility of bubbles due to lack of uniform pressure



Avoid direct sunlight this may cause to colour fading



Cracking at corners may be caused by poor planning, improper packing, a improper transportation conditioning avoid all these to prevent it from cracking



Do not use chemicals for cleaning

■ **TOOLS FOR LAMINATE**



Diamond cutter for Sheet cutting



V- Groove Cutter for proper 90° Bending



Avoid other Cutting Blades

■ **FEATURES**



90° BENDABLE



FIRE RESISTANCE



WATER PROOF



TERMITE & PEST PROOF



LONG LIFE



CARPENTER FRIENDLY



ANTI BACTERIAL



COLOUR CORE



MAKE IN INDIA



PREMIUM QUALITY



ECO FRIENDLY

